


## RF1000-P2.97 indoor Rental LED Display



### Module & cabinet:

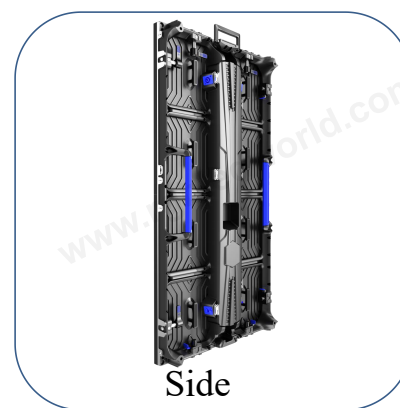

### Features:

- Suitable for P2.604, P2.976, P3.91, P4.81 indoor
- Curved cabinet for optional
- Magnetic module design to realize quick front and back service
- Location pins left and right for fast assembly
- Lightweight only 13.5kg per panel
- Super thin, only 72mm thickness
- Power connectors & ethernet connectors are easy to assemble & disassemble



## Application:

Stage Performance     
  Conference     
  Celebration     
  banquet     
  exhibition

## Technical Specifications(RA1000-P2.976 indoor):

| Pixel Pitch             | P2.97             |
|-------------------------|-------------------|
| LED type                | SMD2121           |
| Pixel configuration     | 3-in-1 SMD        |
| Pixel density           | 112,896 pixels/m2 |
| Module dimension(W*H)   | 250*250mm         |
| Module resolution       | 84*84dots         |
| Drive Method            | 1/21 scan         |
| Maintenance             | back              |
| Cabinet size (W*H)      | 500*1000mm        |
| Cabinet depth           | 72mm              |
| Cabinet material        | Aluminum          |
| Cabinet weight          | 13.5kg/pcs        |
| Brightness              | ≥1000 cd/m2       |
| Best Viewing Distance   | 3m to 30m         |
| Viewing Angle           | 140 * 140         |
| Grey Level              | 14 Bit            |
| Refresh Rate            | ≥1920Hz/3840HZ    |
| Power consumption(Avg.) | 110w/cabinet      |
| Power consumption(Max.) | 320w/cabinet      |
| Humidity-operating      | 10% ~ 95%         |
| Operating Temperature   | -20° - 50° C      |
| Screen life             | ≥100000 hours     |
| Controlling System      | Synch or Async    |
| Certificates            | CE,RoHS,FCC,UL    |
| Ingress Protection (IP) | IP31              |
| Warranty                | 2 Years           |

Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.