



RK500-P3.91 indoor Rental LED Display



Module & cabinet:

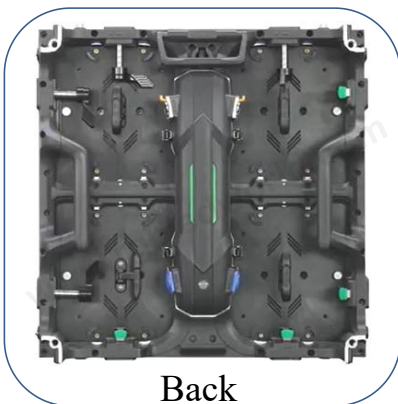

Back

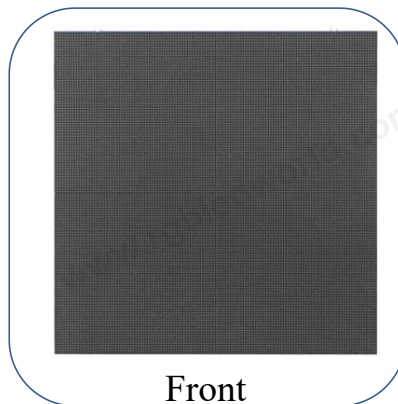


Front



Side

Features:

- Suitable for P2.604, P2.976, P3.91, P4.81 outdoor
- Modular control box easy for changing power supply and receiving card
- Magnetic module design to realize quick front and back service
- Location pins left and right for fast assembly
- Lightweight only 7.7kg per panel
- Super thin, only 85mm thickness
- Power connectors & ethernet connectors are easy to assemble & disassemble



Application:

☐ Stage Performance
 ☐ Conference
 ☐ Celebration
 ☐ banquet
 ☐ exhibition

Technical Specifications(RK500-P3.91 indoor):

Pixel Pitch	P3.91
LED type	SMD2121
Pixel configuration	3 in 1 SMD
Pixel density	65,536 pixels/m ²
Module dimension(W*H)	250*250mm
Module resolution	64*64dots
Drive Method	1/16 scan
Maintenance	Front and back
Cabinet size (W*H)	500*500mm
Cabinet depth	85mm
Cabinet material	Aluminum
Cabinet weight	7.7kg/pcs
Brightness	≥1000 cd/m ²
Best Viewing Distance	4m to 40m
Viewing Angle	140° * 140°
Grey Level	14 Bit
Refresh Rate	≥1920HZ
Power consumption(Avg.)	50w/cabinet
Power consumption(Max.)	150w/cabinet
Humidity-operating	10% ~ 95%
Operating Temperature	-20° - 50° C
Screen life	≥100000 hours
Controlling System	Synch or Async
Certificates	CE,RoHs,FCC,UL
Ingress Protection (IP)	IP31
Warranty	2 Years
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.	