


## LFT-960B series P2.5 outdoor fixed led display



### Cabinets:

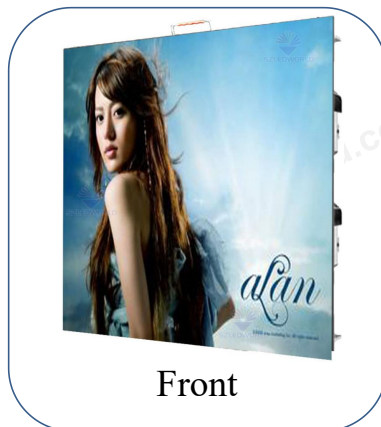

### Features:

- Ultra-thin, 102mm;
- Lightweight, 25kg/cabinet;
- High precision, 0.02mm;
- Super reliability;
- Excellent heat dissipation;
- Convenient installation;
- Excellent shielding;
- Good anti-rust performance;



## Application:

☐ outdoor advertising  
 ☐ government project  
 ☐ athletic contest  
 ☐ Shopping Guide  
 ☐ commercial real estate

## Technical Specifications:

| Pixel Pitch                                                                                                                      | P2.5                        |
|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| LED type                                                                                                                         | SMD1415                     |
| Pixel configuration                                                                                                              | 3-in-1 SMD                  |
| Pixel density                                                                                                                    | 160,000 pixels/m2           |
| Module dimension(W*H)                                                                                                            | 320*160mm                   |
| Module resolution                                                                                                                | 128*64dots                  |
| Drive Method                                                                                                                     | 1/16 scan                   |
| Cabinet size (W*H)                                                                                                               | 960*960mm                   |
| Cabinet depth                                                                                                                    | 102mm                       |
| Cabinet material                                                                                                                 | magnesium or aluminum alloy |
| Cabinet weight                                                                                                                   | 25kg/pcs                    |
| Brightness                                                                                                                       | ≥5500 cd/m2                 |
| Best Viewing Distance                                                                                                            | 2.5m to 25m                 |
| Viewing Angle                                                                                                                    | 140° * 140°                 |
| Grey Level                                                                                                                       | 14 Bit                      |
| Refresh Rate                                                                                                                     | ≥1920HZ                     |
| Power consumption(Avg.)                                                                                                          | 400 w/cabinet               |
| Power consumption(Max.)                                                                                                          | 1200 w/cabinet              |
| Humidity-operating                                                                                                               | 10% ~ 95%                   |
| Operating Temperature                                                                                                            | -20° - 50° C                |
| Screen life                                                                                                                      | ≥100000 hours               |
| Controlling System                                                                                                               | Sync or Async               |
| Certificates                                                                                                                     | CE,RoHs,FCC,UL              |
| Ingress Protection (IP)                                                                                                          | IP65                        |
| Warranty                                                                                                                         | 2 Years                     |
| Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD. |                             |