



Indoor transparent LED Display (LTI series)




Cabinet:

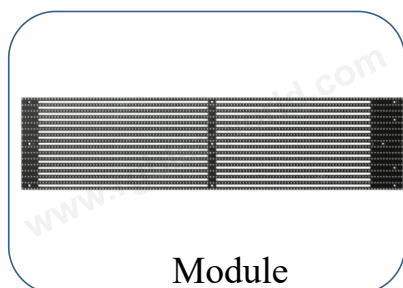

Module

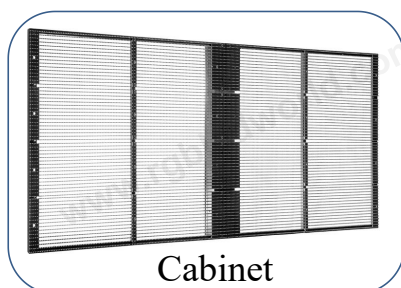

Cabinet

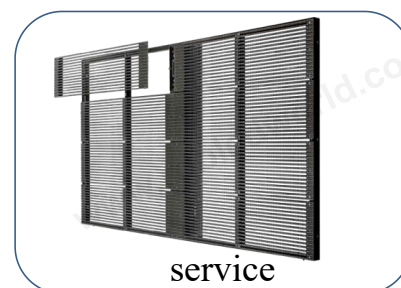

service

Features:

- Supported customized cabinet.
- Optional color: black or white.
- High transparent rate, the highest can reach 80%.
- Slim cabinet, space-saving; lightweight, no need to change the architectural structure adapt to different installation places.
- Environmental Projection: no need for air-con.
- Easy maintenance: fast-replaced module, support front, and rear service.
- Stacking, hanging and fixed installation are supported.
- GOB surface is for option, which can reach IP43 and lamp protected.



Application:

☐ Shopping malls
 ☐ Airports
 ☐ Exhibitions
 ☐ Stores
 ☐ 4S shops

Technical Specifications:

Model	LTI2.6-5.2	LTI3.9-7.8	LTI5.2-10.4	LTI 10.4	LTI 15.6
Pixel Pitch(mm)	H:2.6 V:5.2	H:3.9 V:7.8	H:5.2 V:10.4	H:10.4 V:10.4	H:15.6 V:15.6
Transparency Rate	55%	75%	65%	65%	80%
Resolution(dot/ m²)	73728	32768	18432	9216	4096
Cabinet Resolution	384x95	256x64	192x48	96x48	64x32
Weight(Kg/ m²)	9	11	11	11	11
Refresh(Hz)	5120	5120	3840	3840	3840
Driving IC	ICN2153	ICN2153	MY9866	MY9866	ICN2038S
Scan Mode	1/12	1/8	1/4	1/4	1/2
LED Type	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727
Brightness(cd/ m²)	≥ 4500				
Lamp Life Span	≥ 100 000 hours				
Pixel Compose	RGB all in one				
Grey Scale	14bit				
Max Power Consumption(W/ m²)	800				
Ave. Power Consumption(W/ m²)	260				
LED Control System	Mooncell T120/NOVA				
Connection & Control	WiFi / DVI / HDMI / DP / USB/RJ45 / Remote Internet control				
IP Level	IP30				
Clean Ghosting	Yes				
Input Power	AC100~240V 50/60Hz				
Module Input Power	DC4.7~5V ±0.2V				
Cabinet Size(mm)	1000x500x80				
Cabinet Material	Aluminum Profile				
Maintenance	Front Maintenance				
Working Tempareture and humidity	Temperature : -10~40°C; Humidity: 10%-90%, non-condensing				
Installation	Hanging （vertical 20pcs cabinet) 10） / Stacking / Fixed installation ）				
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.					