



Outdoor fixed led display (LFEV960)

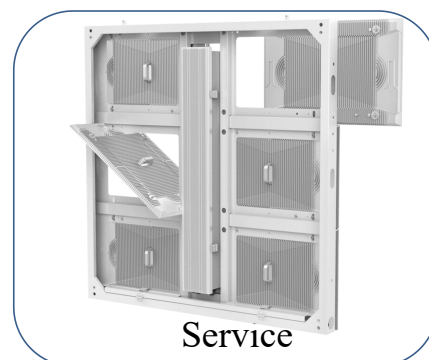

Features:

- Common cathode energy-saving technology, more than 50% energy-saving than traditional outdoor LED display;
- Aluminum material, good heat dissipation, no need for fans;
- High brightness, the highest brightness can reach 10000nits, adapt to strong light;
- Stable, integrated design, stability increased by 60%;
- Ultra-thin outdoor cabinet, 101mm;
- Ultra-light cabinet, 28kg/cabinet;

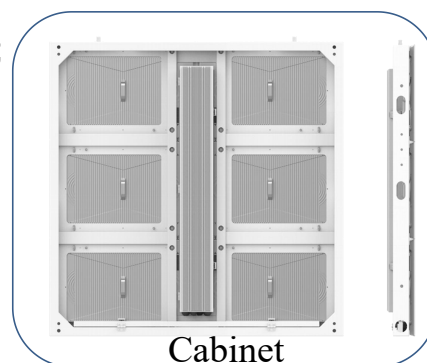

Application:

○ outdoor advertising ○ government project ○ athletic contest ○ Shopping Guide ○ commercial real estate

Technical Specifications:

Parameter	LFEV6.67	LFEV8	LFEV10
Pixel Configuration	SMD 2727	SMD 3535	SMD 3535
Pixel Pitch (mm)	6.67	8	10
Module size(mm) (W×H×D)	480 x320 x23.5mm	480 x320 x23.5mm	480 x320 x23.5mm
Module resolution (W×H)	72 X 48	60 X 40	48 X 32
Module weight(kg/module)	2.5	2.5	2.5
Cabinet Size (mm) (W×H×D)	960 x 960 x 101.2	960 x 960 x 101.2	960 x 960 x 101.2
Cabinet resolution (W×H)	144 X 144	120 X 120	96 X 96
Cabinet area (m2)	0.92	0.92	0.92
Weight (kg/cabinet)	28	28	28
Color Temperature	6500~9500K	6500~9500K	6500~9500K
Processing	16 bit	16 bit	16 bit
Drive method	1/6 scan	1/3 scan	1/2 scan
Brightness (nits)	5000~7500(goldwire)	5500~8000(goldwire)	5500~8500(goldwire)
Viewing Angle (Horizontal/Vertical °)	160/140	160/140	160/140
Contrast Ratio	5000:01:00	5000:01:00	5000:01:00
Max Power Consumption/m2)	570W	550W	550W
Avg Power Consumption (W/m2)	190W	185W	185W
Power Supply	AC100~240V (50/60Hz)	AC100~240V (50/60Hz)	AC100~240V (50/60Hz)
Refresh Rate (Hz)	>3840 (gold wire)	>3840 (gold wire)	>3840 (gold wire)
Lifetime (hrs)	100,000	100,000	100,000
Operation Temperature Range (°C)	-30 -- 65	-30 -- 65	-30 -- 65
Operation Humidity Range (RH)	10 -- 95%	10 -- 95%	10 -- 95%
IP rating (F/R)	IP68/IP65	IP68/IP65	IP68/IP65
Service	(F/R)	(F/R)	(F/R)
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.			