



Outdoor transparent LED Display (LTO series)




Cabinet:

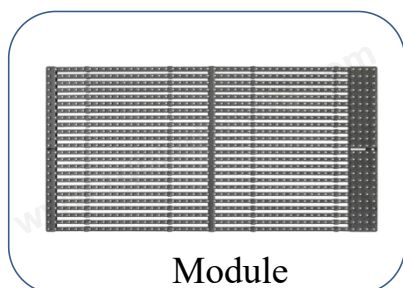

Module

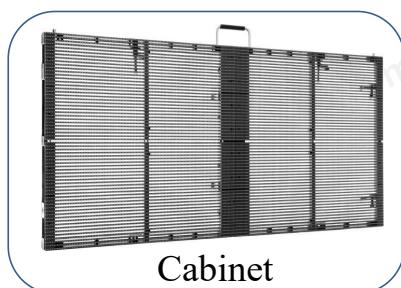

Cabinet

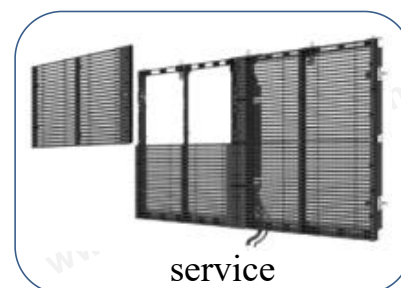

service

Features:

- Die casting cabinet, slim, strong, and seamless assembling.
- High transparent rate, the highest can reach 71%.
- Slim cabinet, space-saving; lightweight, no need to change the architectural structure, adapt to different installation places.
- Environmental Projection: no need for air-con; Winds can go through the screen, low wind drag.
- Easy maintenance: fast-replaced module, support front, and rear service.
- Stacking, hanging and fixed installation are supported.
- The lamp & PCB are fully sealed by silicon, anti-dust and anti-collision, IP65, and adapt to harsh weather



Application:

☐ Shopping malls
 ☐ Airports
 ☐ Exhibitions
 ☐ Stores
 ☐ 4S shops

Technical Specifications:

Model	LTO3.9-7.8	LTO5.2-10.4	LTO10.4	LTO15.6
Pixel Pitch(mm)	H:3.9 V:7.8	H:5.2 V:10.4	H:10.4 V:10.4	H:15.6 V:15.6
Transparency Rate	53%	58%	58%	71%
Resolution(dot/ m²)	32768	18432	9216	4096
Cabinet Resolution	256x64	192x48	96x48	64x32
Weight(Kg/ m²)	15	15	15	15
Refresh(Hz)	3840	3840	3840	3840
Driving IC	ICN2153PWM	MY9866	MY9866	ICN2038S
Scan Mode	1/8	1/4	1/2	Static
LED Type	SMD1921	SMD1921	SMD2727	SMD2727
Brightness (cd/ m²)	≥ 4500			≥ 5500
Lamp Life Span	≥ 100 000 hours			
Pixel Compose	RGB all in one			
Grey Scale	14bit			
Max Power Consumption (W/ m²)	800			
Ave. Power Consumption(W/ m²)	260			
LED Control System	NOVA			
Connection & Control	WiFi / DVI / HDMI / DP / USB/RJ45 / Remote Internet control			
IP Level	IP65			
Clean Ghosting	Yes			
Input Power	AC100~240V 50/60Hz			
Module Input Power	DC4.7~5V ±0.2V			
Cabinet Material (mm)	1000x500x80			
Cabinet Material	Die Casting			
Maintenance	Front/ Rear Service			
Working Tempareture and humidity	Temperature : -10~40°C; Humidity: 10%-90%, non-condensing			
Installation	Hanging (vertical 20pcs cabinet) 10 / Stacking / Fixed installation			
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.				