


Transparent LED poster stand (LTPS series)



Cabinet:

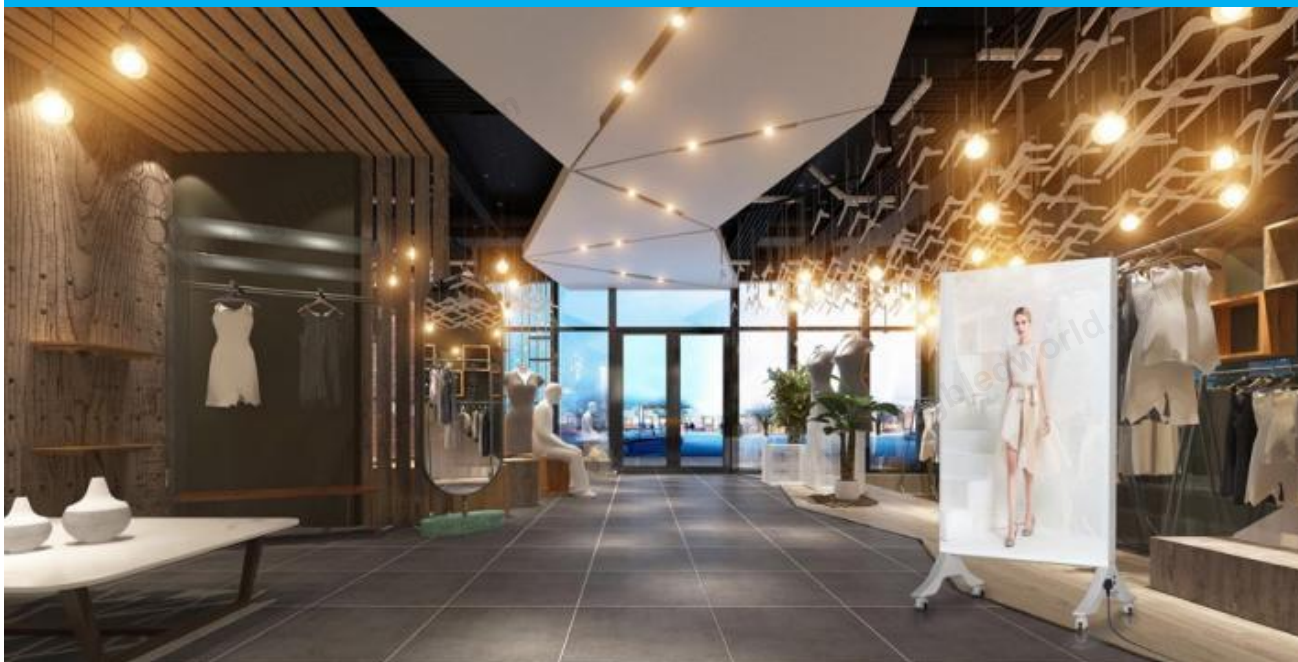

Features:

- Removable
- High transparent rate, the highest can reach 80%;
- Environmental Projection: no need air-con.
- Easy maintenance: fast replaced module, support front service
- Supported Hanging.



Application:

☐ Shopping malls
 ☐ Airports
 ☐ Exhibitions
 ☐ Stores
 ☐ 4S shops

Technical Specifications:

Model	LTPS2.6-5.2		LTPS3.9-7.8	
Pixel Pitch(mm)	H:2.6 V:5.2		H:3.9 V:7.8	
Transparency Rate	65%		55%	75
Resolution(dot/ m²)	73728		32768	
Cabinet Resolution	384x96		256x64	
Weight(Kg/ m²)	9		15	
Refresh(Hz)	5120		5120	
Driving IC	ICN2153		ICN2153	
Scan Mode	1/12		1/8	
LED Type	SMD1415	SMD1515	SMD1921	SMD2020
Brightness(cd/ m²)	1200	3500	4500	2500
Lamp Life Span	≥ 100 000 hours			
Pixel Compose	RGB all in one			
Grey Scale	14bit			
Max Power Consumption(W/ m²)	800			
Ave. Power Consumption(W/ m²)	260			
LED Control System	MooncellT120/NOVA			
Connection & Control	WiFi / DVI / HDMI / DP / USB/RJ45 / Remote Internet control			
IP Level	IP43			
Clean Ghosting	Yes			
Input Power	AC100~240V 50/60Hz			
Module Input Power	DC4.7±0.2V			
Cabinet Size(mm)	1000x500x80			
Cabinet Material	Aluminum Profile			
Maintenance	Front Maintenance			
Working Tempareture and humidity	Temperature : -10~40℃; Humidity: 10%-90%, non-condensing			
Installation	Hanging （vertical 20pcs cabinet) 10） / Stacking / Fixed installation ）			
Notes: Specifications are for reference only. Please contact our salesperson for details. All rights are reserved to SZLEDWORLD.				